



putzwerk



Plaster/Render



Masonry mortar



Tile Adhesives



Masonry mortar for AAC blocks

- Bonding Coats
- Cement Renders/Plasters
- Decorative Colour Renders
- Decorative Texture Finishes
- Gypsum Plasters
- Masonry Mortars
- Tile Adhesives
- Tile Grouts
- Floor Screeds
- Repair Mortars
- Non-shrink Grouts
- Insulation Mortars

www.putzwerk.com

Putzwerk L.L.C is a leading manufacturer of dry mix products combining the latest German dry mix technology with high quality raw materials in the region.

Putzwerk most modern dry mix manufacturing facility is located at Samail Industrial Estate-Lizough, Sultanate of Oman. Putzwerk provides wide range of products and services to meet the fast growing and challenging demands of the construction industry in the Sultanate of Oman. Putzwerk is dedicated to serve the construction industry by setting up new standards. We offer a wide range of dry mix products based on Cement and Gypsum with more than a decade of experience in the middle-east. We are dedicated to achieve highest customer satisfaction through the quality, reliability and consistency of our products and services.

Putzwerk offers the most modern silo system with pneumatic dry mix conveying and automatic application machines for the construction industry. The system offers ready to apply products at the "press of a button". Factory produced dry mix mortar are much more reliable and productive than site mixed mortars. Each product is accurately produced to ensure the quality and consistency. We offer the product delivery to the site in mobile silos or bags, range of machines are available to suit with the various application and usage of the products at site. Putzwerk offers the application machines from PFT, Germany. The machine application ensures the homogeneous and accurate mixing of the dry mix with water, thus eliminating the errors that can occur with the manual mixing. The products are reachable to any distance in time with mobile silos and pneumatic conveying system at the "press of a button". The system will provide the customers a clear edge in terms of quality and productivity.

Putzwerk silo system with the pneumatic dry mix conveying will provide a clean and dust free job site adding more value to health, safety and environment.

Putzwerk products are designed and manufactured meeting the specification of BS/EN/ASTM/DIN standards. Our most modern state of the art manufacturing facility and stringent quality control will ensure the quality and consistency of the products. Our fully equipped testing laboratory will work round the clock ensuring the quality. Putzwerk will be assuring the quality of products by strict quality control measures starting from the selection of raw material to the finished products. We can design, develop and manufacture custom made products meeting the specific requirements of our valued customers.

Our dedicated team of sales/QC/site engineers will provide the customers total support.

Putzwerk offers a wide products range of Bonding Coats , Cement Renders/Plasters , Decorative Color Renders , Decorative Texture Finishes, Insulation Mortars , Gypsum Plasters, Masonry Mortars, Tile Adhesives, Tile Grouts, Floor Screeds, Repair Mortars , Non-Shrink Grouts etc.

Putzwerk offers its products delivery to the site in 25-50 kg paper bags in wooden pallets with plastic shrink wrap or 20 m³ mobile silos which can be placed at site and refilled by tanker.

Advantages of Putzwerk system

- | Ready to apply material at the "press of a button"
- | Largest production facility in the region
- | More than a decade of experience in the middle east
- | Save time and man power
- | Consistent quality throughout the project
- | Dry mix products requires only the addition of water at site
- | Clean and healthy job site adding value to HSE
- | Material protected from weather, spillage and theft
- | Ease of the application resulting in more out put
- | Most modern machines and tools for the application




Product list				
Product category/name/code		Field of application	Packing	Approx coverage [per tonne]
Bonding Coats	Bonding Coat PW100	Bonding coat for rendering on normal fair faced concrete surfaces. Application by tyrolean box/ spray gun @ 2-5mm.	50 kg bags	430 m ² @ 2mm thickness
	Bonding Coat PW120	Bonding coat for rendering on densified concrete surfaces. Application by tyrolean box/ spray gun @ 2-5mm.	50 kg bags	430 m ² @ 2mm thickness
	Bonding Coat PW140	Bonding coat for rendering on ultra smooth concrete surfaces. Application by tyrolean box/ spray gun @ 2-5mm.	50 kg bags	430 m ² @ 2mm thickness
	Bonding Coat PW150	Bonding coat for rendering on impermeable/non absorbing surfaces (EPS/XPS etc). Application by tyrolean box/ spray gun @ 5-6mm.	50 kg bags	430 m ² @ 2mm thickness
Cement Renders/Plasters	Cement Render/ Plaster PW200	Render/plaster for internal/external concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo 50 kg bags	42 m ² @ 15mm thickness
	Cement Render/Plas- ter (AAC/Concrete) PW210	Render/plaster for internal/external AAC/concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo 50 kg bags	42 m ² @ 15mm thickness
	Cement Render/Plas- ter-LW PW220	Light weight render/plaster for internal/external AAC/concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo 40 kg bags	50 m ² @ 15mm thickness
	Cement Render-PG PW230	Render for external plinth areas. Application by spray machine/manual @ 15-20mm.	Silo 50 kg bags	30 m ² @ 20mm thickness
	Cement Render/Plas- ter-HSG PW240	Render/plaster for high strength (> 15 MPa) requirements. Application by spray machine/manual @ 15-50mm.	Silo 50 kg bags	37 m ² @ 15mm thickness
	Cement Plaster-FG PW250	Fine thin coat plaster for ceilings and rough cement plaster surfaces. Application by spray machine/manual @ 4-6mm.	Silo 40 kg bags	162 m ² @ 4mm thickness
Decorative Colour Renders	Decorative Colour Render PW300	Decorative colour render for external block walls. Application by spray machine/manual @ 15-20mm.	Silo 50 kg bags	42 m ² @ 15mm thickness
	Decorative Colour Render-TG PW310	Decorative textured color render for external block walls. Application by spray machine/manual @ 15-20mm.	Silo 50 kg bags	35 m ² @ 15mm thickness
	Rock Work Render PW320	High strength (> 15 MPa) decorative textured color render for landscaping works. Application by spray machine/manual @ 15-50mm.	Silo 50 kg bags	38 m ² @ 15mm thickness
Decorative Texture Finishes	SprayTex PW370	Decorative spray applied texture finishes for external/internal walls. Application by spray gun/manual @ 3-4mm.	50 kg bags	180 m ² @ 3.5mm thickness

Product list				
Product category/name/code		Field of application	Packing	Approx coverage [per tonne]
Decorative Texture Finishes	TrowelTex PW380	Decorative trowel applied texture finishes for external/internal walls. Application by manual @ 3-4mm.	50 kg bags	160 m ² @ 3.5mm thickness
	Gypsum Plaster-SG PW400	Standard gypsum plaster for internal AAC/concrete block walls. Application by spray machine/manual @ 10-20mm.	Silo 25 kg bags	58 m ² @ 12mm thickness
Gypsum Plasters	Gypsum Plaster-FG PW410	Fine thin coat gypsum plaster for ceilings and rough cement plaster surfaces. Application by spray machine/manual @ 4-6mm.	Silo 25 kg bags	208 m ² @ 4mm thickness
	Gypsum Plaster-DG PW412	Fine thin coat gypsum plaster for direct application on concrete surfaces. Application by spray machine/manual @ 4-6mm.	Silo 25 kg bags	208 m ² @ 4mm thickness
Masonry Mortars	Masonry Mortar for Concrete Blocks PW500	Block laying mortar for concrete block works. Mixing by screw machine/manual.	Silo 50 kg bags	37 m ² @ 10mm thickness (40x20x20cm Block)
	Masonry Mortar for AAC Blocks PW510	Block laying mortar for AAC block works. Mixing by screw machine/manual.	Silo 40 kg bags	108 m ² @ 5mm thickness (60x25x20cm Block)
Tile Adhesives	Tile Adhesive-EG PW550	Economical grade Tile adhesive for ceramic/porcelain tiles on internal /external areas. Mixing by screw machine/manual.	Silo 40 kg bags	Yield 635 L/ton
	Tile Adhesive-HG PW552	High grade Tile adhesive for ceramic/porcelin tiles on internal /external areas. Mixing by screw machine/manual.	Silo 40 kg bags	Yield 685 L/ton
	Tile Adhesive-FG PW554	Flexible grade Tile adhesive for ceramic/porcelain/glass tiles on internal/ external areas. Mixing by screw machine/manual.	Silo 40 kg bags	Yield 685 L/ton
Tile Grouts	Tile Grout-SG PW580	Standard grade Tile grout for ceramic/porcelain tiles on internal/ external areas. Mixing by screw machine/manual.	40 kg bags	Yield 690 L/ton
	Tile Grout-HG PW582	High gradeTile grout for ceramic/porcelain/glass tiles on internal/ external areas. Mixing by screw machine/manual.	40 kg bags	Yield 690 L/ton
Floor Screeds	Floor Screed (15MPa - 40MPa) PW600	Bonded/un bonded/floating leveling screed for floors. Mixing by screw machine/manual.	Silo 50 kg bags	Yield 530 L/ton
Repair Mortars	Repair Mortar-FG PW700	Fine repair mortar for concrete surfaces. Mixing by screw machine/manual.	40 kg bags	Yield 620 L/ton
	Repair Mortar-CG PW710	Thick repair mortar for concrete surfaces. Mixing by screw machine/manual.	50 kg bags	Yield 530 L/ton

Product list				
Product category/name/code		Field of application	Packing	Approx coverage [per tonne]
Non-shrink Grouts	Repair Mortar-PG PW750	Fine repair mortar for plaster cracks. Mixing by manual.	40 kg bags	Yield 650 L/ton
	Non-shrink Grout-MG PW800	Non-shrink grouting mortar for medium strength (40MPa) anchoring applications. Mixing by screw machine/manual.	Silo 50 kg bags	Yield 510 L/ton
	Non-shrink Grout-HG PW810	Non-shrink grouting mortar for high strength (70MPa) anchoring applications. Mixing by screw machine/manual.	Silo 50 kg bags	Yield 510 L/ton
Insulation Mortars	Thermo Render PW900	Thermal insulation render for external walls (Thermal conductivity value $\lambda=0.1$ W/m.K) Application by spray machine/manual @ 20-60mm.	Silo 15 kg bags	48 m ² @ 40mm thickness
	Thermo Adhesive PW910	Adhesive/reinforcing layer for EPS/XPS thermal insulation sheets.	Silo 40 kg bags	200 m ² @ 3mm thickness

SILO SYSTEM

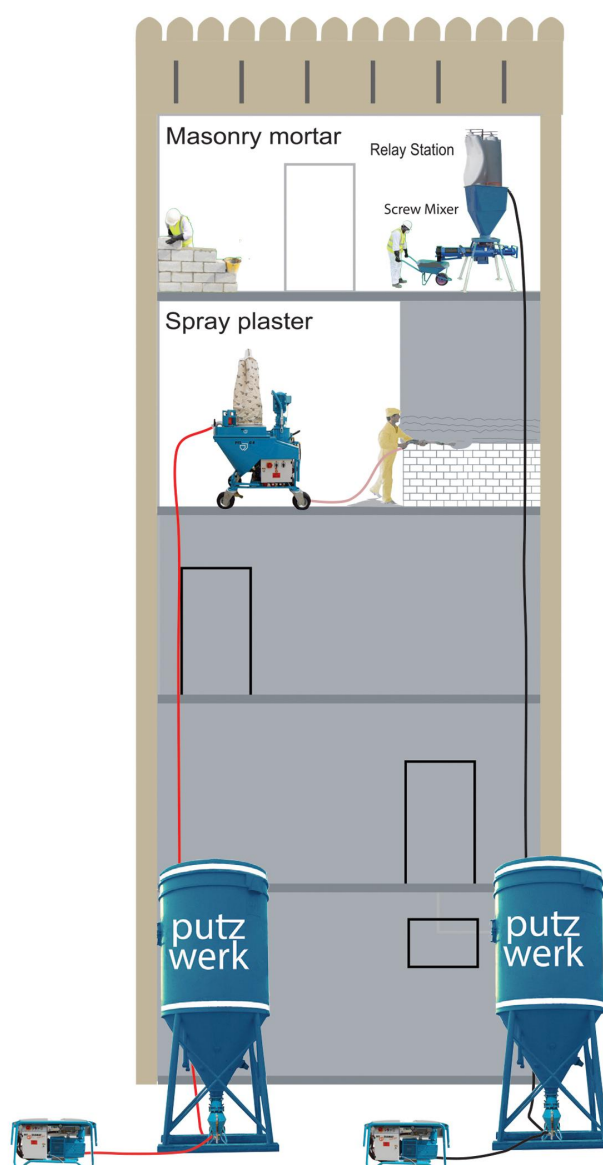



- الطبقة الأولى
- بلاستر داخلي/ بلاستر خارجي
- بلاستر ملون
- بلاستر مزخرف
- بلاستر جبسي
- مونة الطابوق
- لاصق البلاط
- حشو فراغات البلاط
- مونة عازلة



PUTZWERK L.L.C

P.O.Box: 437, Postal code : 620, Lizough
Samail Industrial Estate, Sultanate of Oman
Tel.: (+968)93 20 7210, Fax: (+968) 93 24 6470
E-mail: info@putzwerk.om
Website: www.putzwerk.om

ص.ب: ٤٣٧، رمز البريدي: ٦٢٠، لزغ
منطقة سمائل الصناعية، سلطنة عُمان
هاتف: ٢٠٧٢١٠ ٩٣ (+٩٦٨)، فاكس: ٢٤٦٤٧٠ ٩٣ (+٩٦٨)
البريد الإلكتروني: info@putzwerk.om
الموقع: www.putzwerk.om